



BEAUTIFY YOUR SPACES WITH NATURE'S BEST

Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12801



K 12802



Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12803



K 12804

Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12805




K 12806



Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH

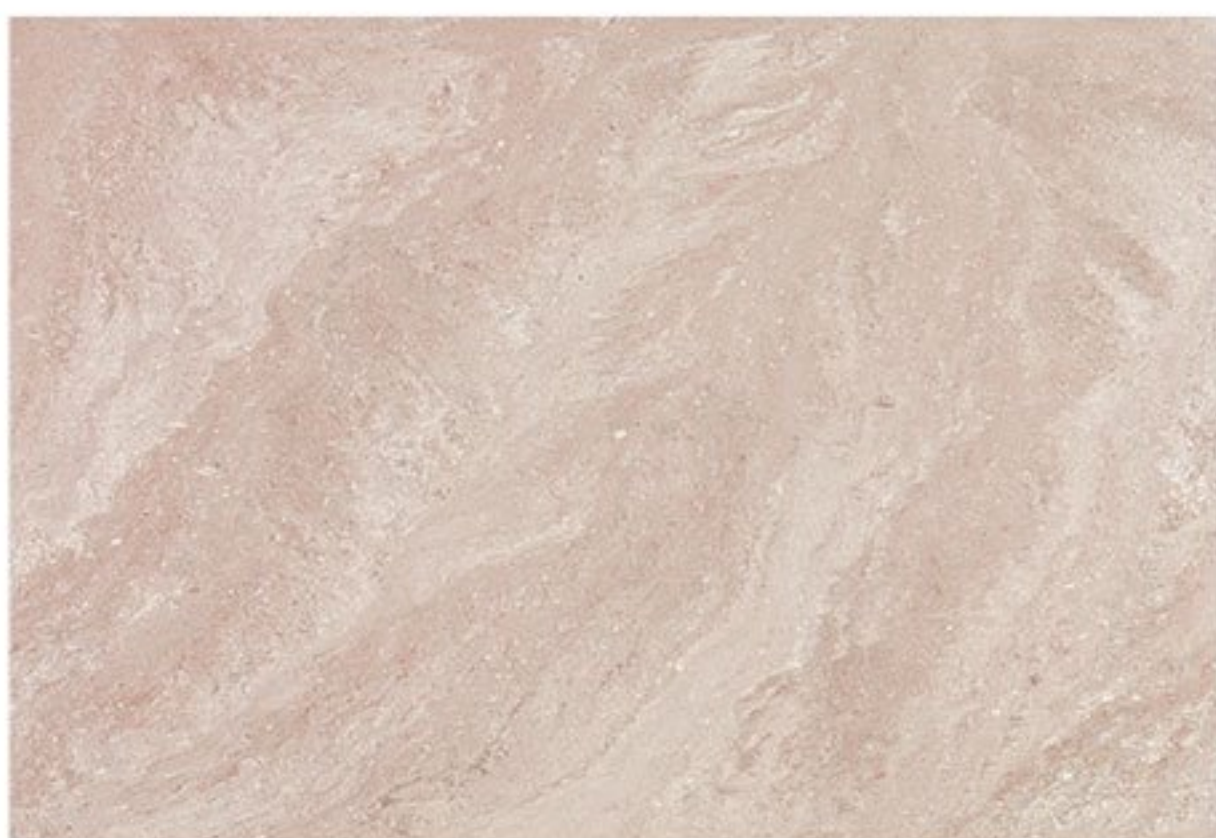

K 12808



K 12809

Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12810



K 12811




Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12812

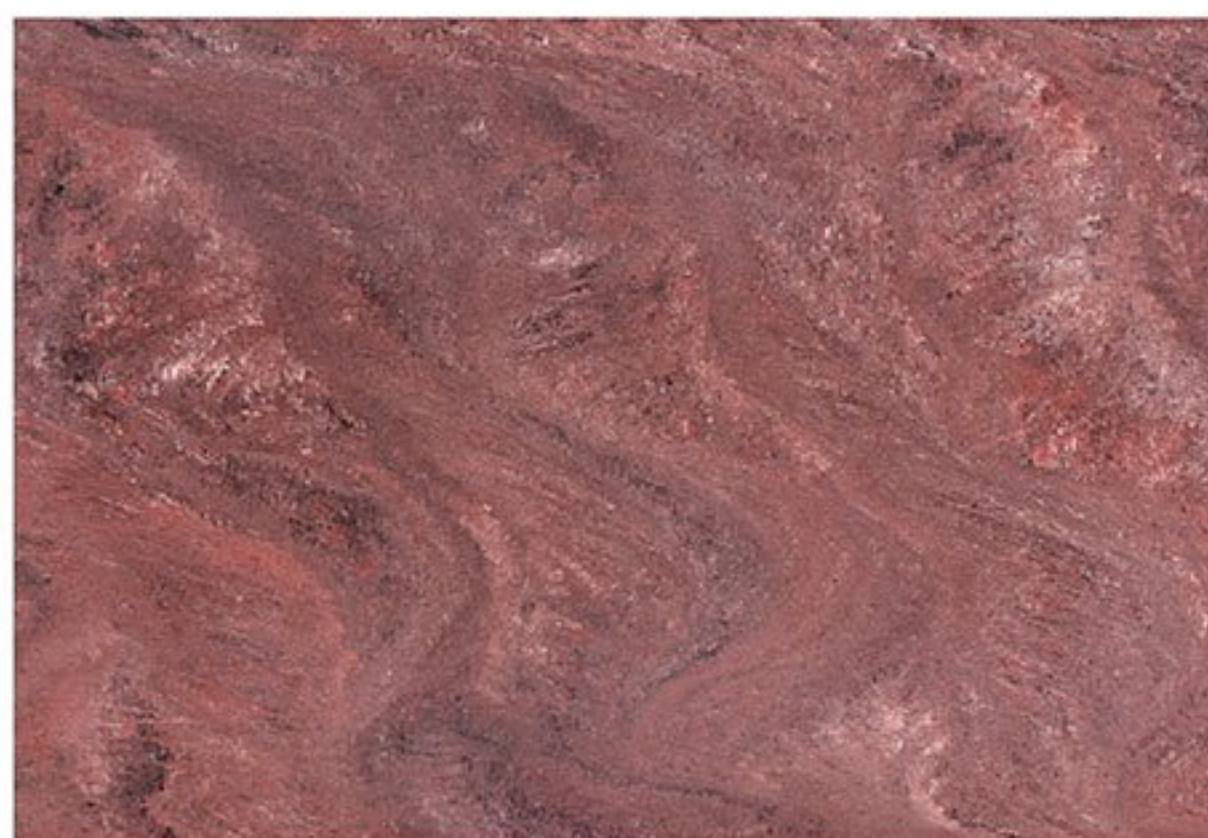

K 12813

Grande

80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 12814



K 12815




Grande
80x120 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH




K 12816



K 12800*

*SPECIAL PLAIN COLOUR

80x80 CM

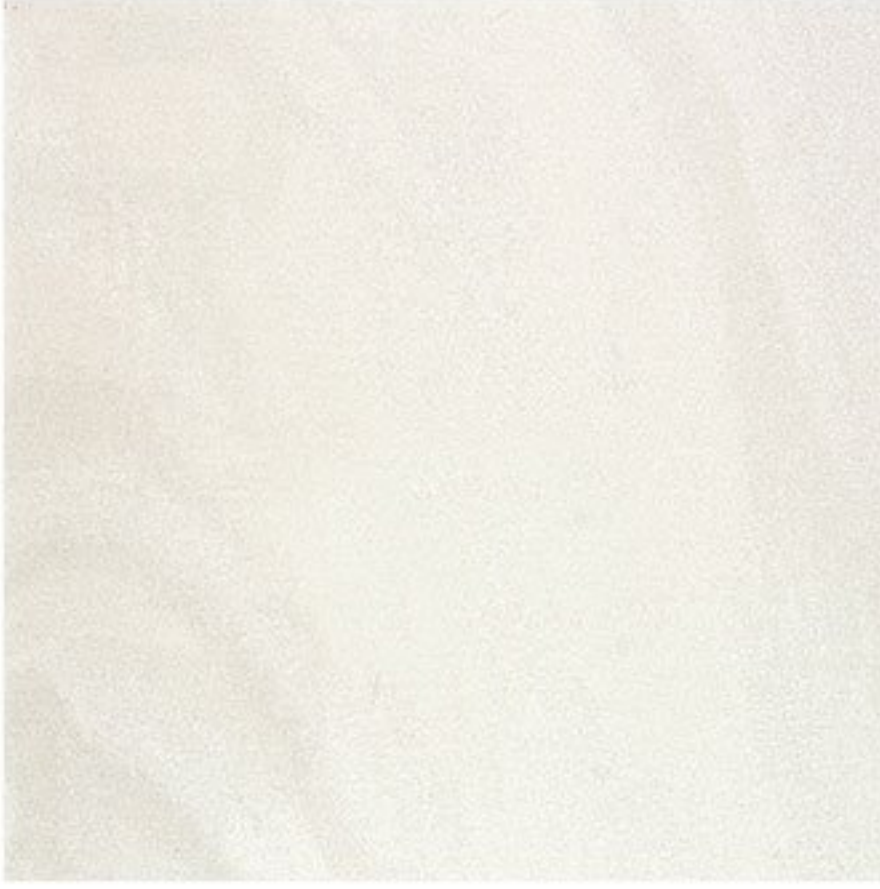


K 8801



K 8802



80x80 CM

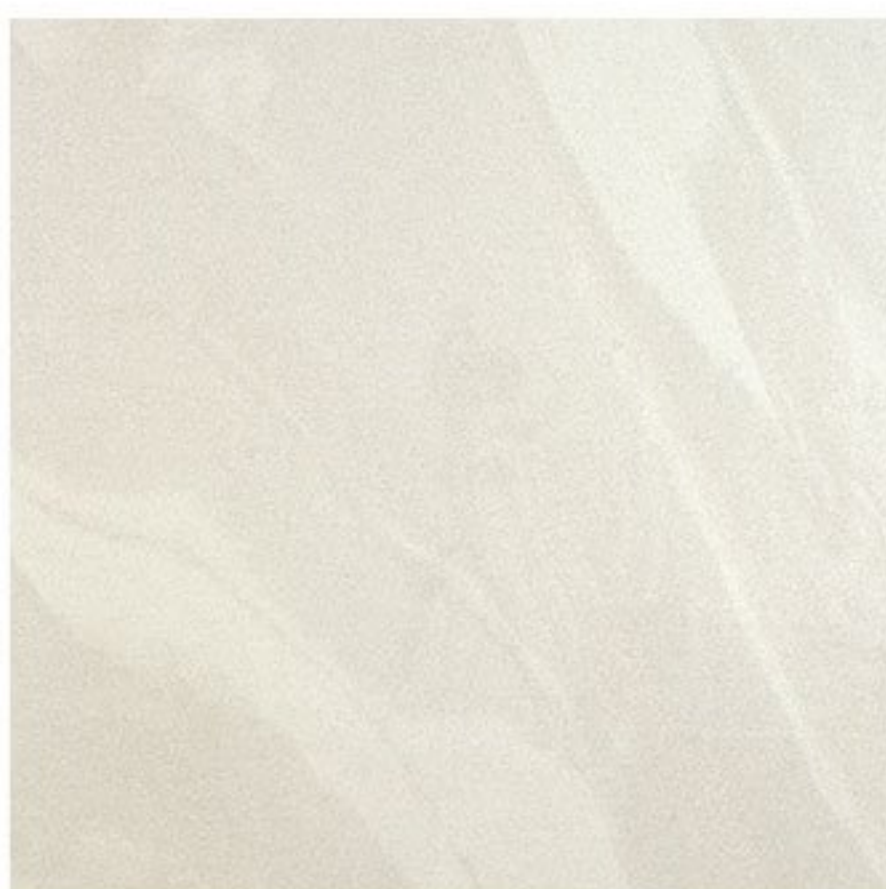

K 8803



K 8804

80x80 CM



K 8805



K 8806



80x80 CM



K 8807



K 8808

80x80 CM



K 8809



K 8810



80x80 CM



K 8811



K 8812



K 8813



K 8814

80x80 CM



K 8815



K 8816



80x80 CM



K 8817



K 8818

80x80 CM



K 8819



K 8820



80x80 CM



K 8821



K 8822

80x80 CM



K 8823



K 8824




K 8825




K 8826



80x80 CM

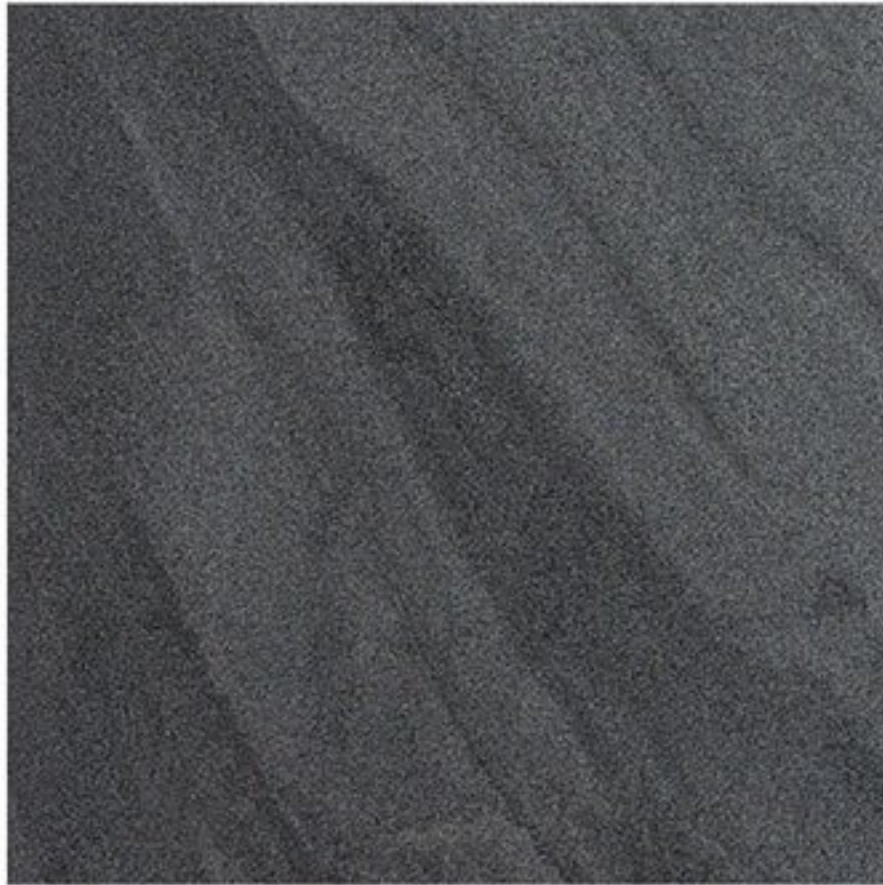


K 8827

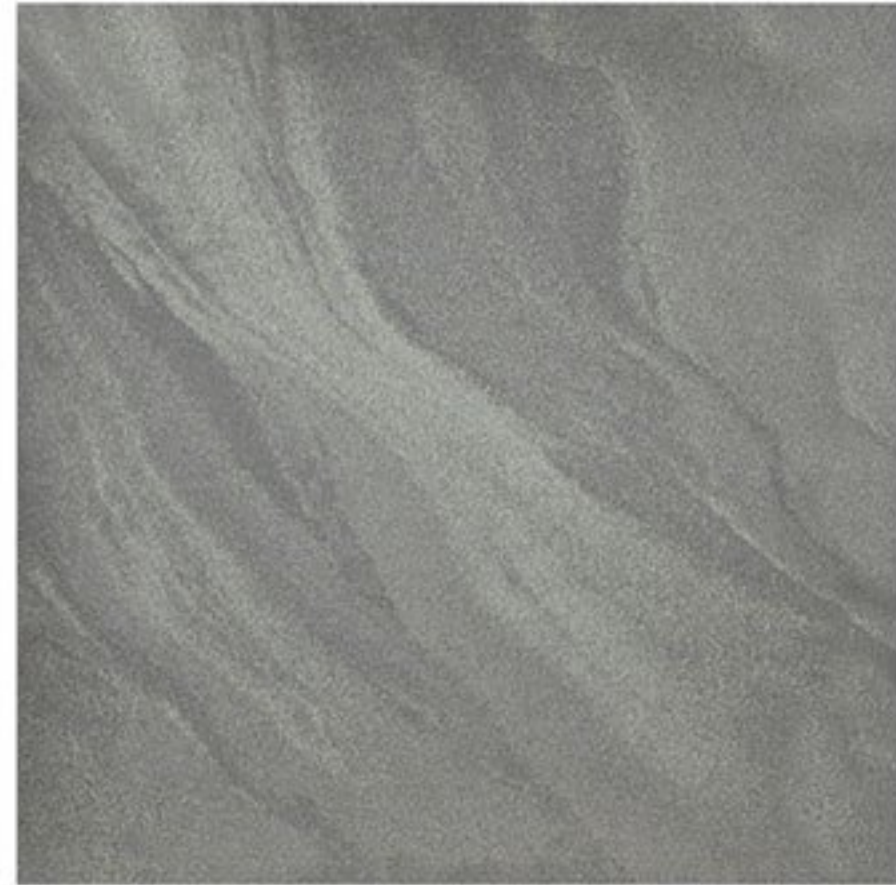


K 8828

New

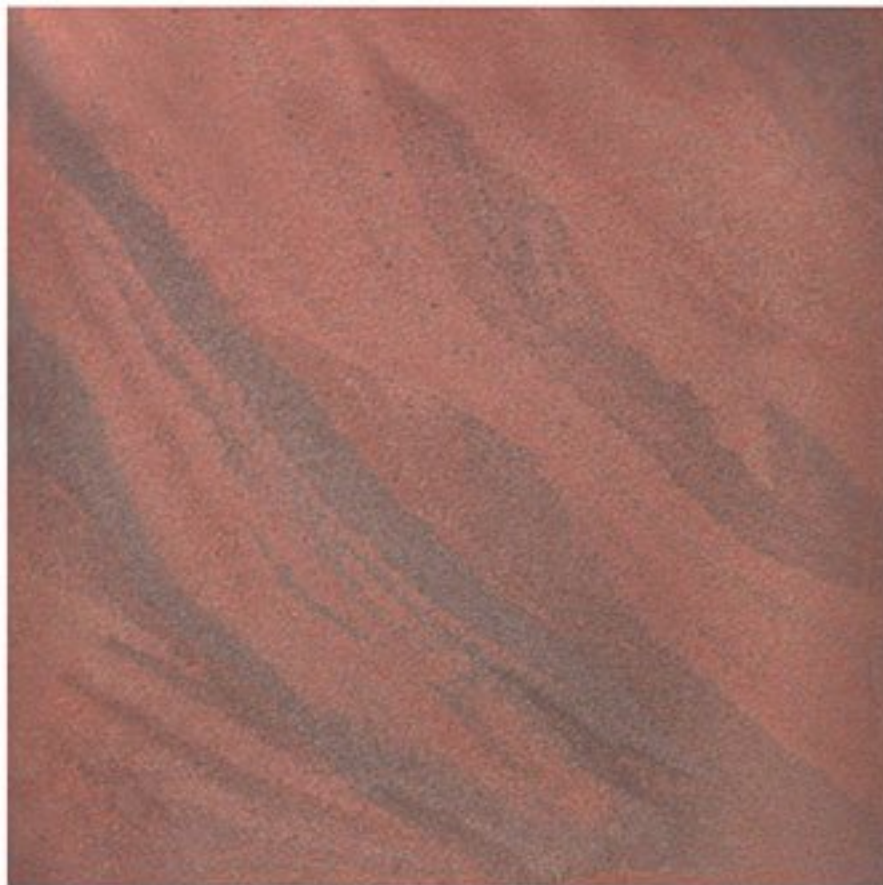

K 8829

New



K 8800

60x60 CM



K 6801




K 6802



K 6803



K 6804

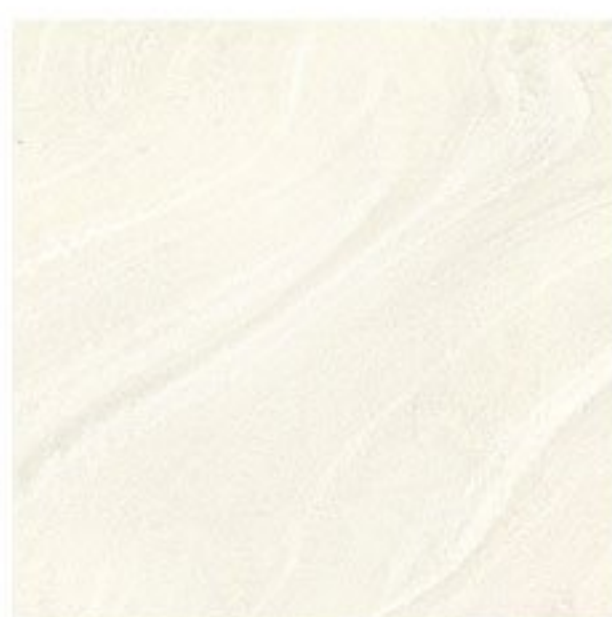

K 6805



K 6806





K 6807



K 6808



K 6809



K 6029



K 6030




K 6201



K 6202



K 6204

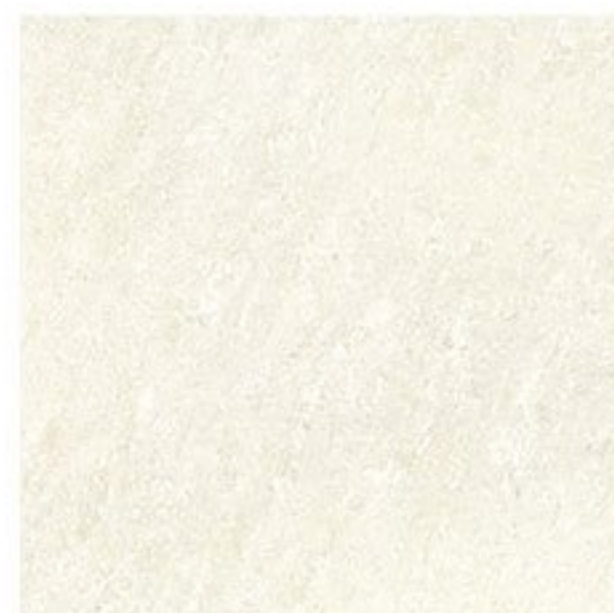

K 6206






K 6207



K 6208

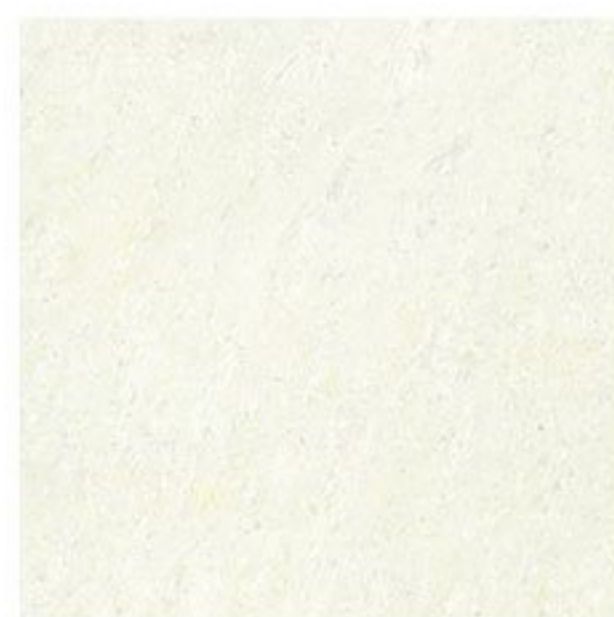

K 6209



K 6210



K 6211



K 6212

PREMIUM
60x60 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 6213




K 6214



K 6215



K 6221

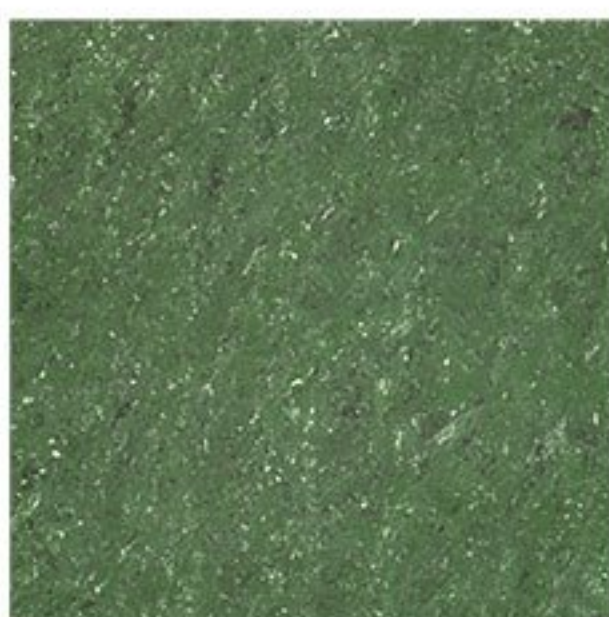

K 6222



K 6223






K 6301



K 6306




K 6601

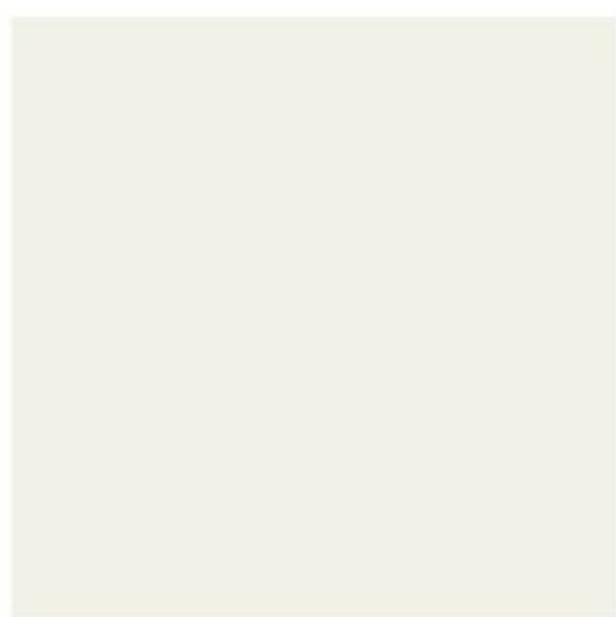

K 6000



K 6001

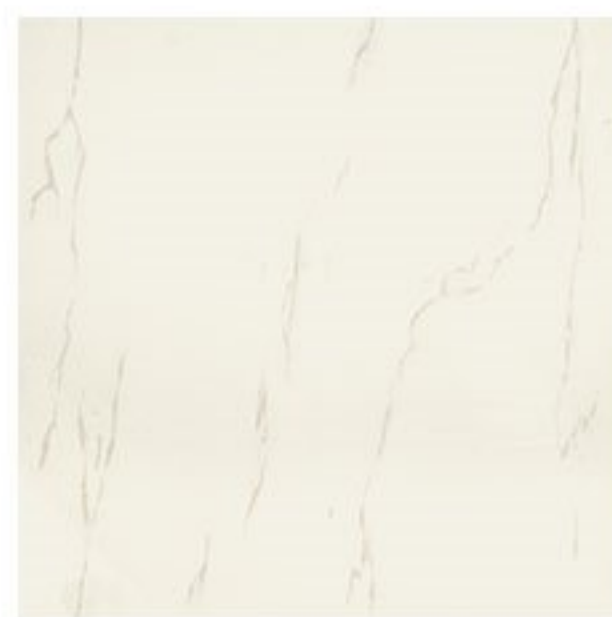

K 6002



K 6005



K 6007



K 6008



K 6010



K 6014



K 6015



K 6016



K 6018




K 6019

ELEGANT SOLUBLE SALT
60x60 CM

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH

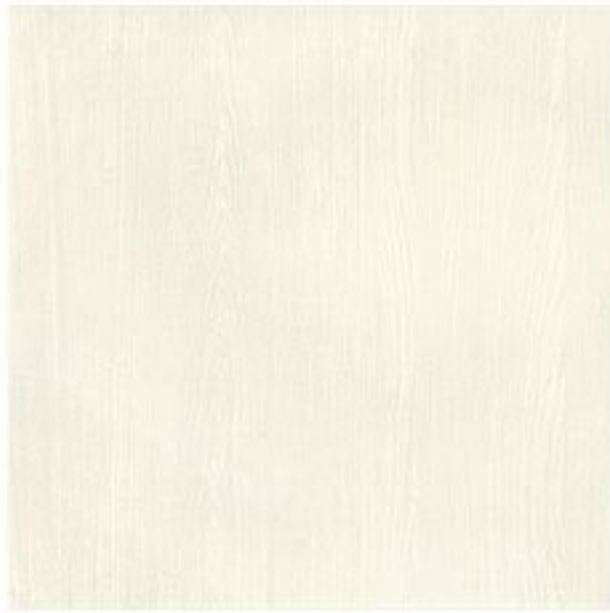

K 6101



K 6102



K 6103

New



K 6104

New



K 6105

New



K 6106

New



K 6107

New



K 6108

New




K 6109

New

SPECIAL PLAIN COLOUR

POLISHED VITRIFIED TILES

SUPER GLOSSY
NANO-TECH



K 7000

TECHNICAL SPECIFICATIONS

S. No.	Technical Characteristics	ISO Test Method	Requirements as per ISO 13006 (Group BIa)	IS 15622:2006 Requirement	Our exiting Specs.	Recommended value
1.	Deviation in Length and Width	ISO 10545-2	± 0.6%	± 0.1%	± 0.1%	± 0.1%
2.	Deviation in Thickness	ISO 10545-2	± 5%	± 4%	± 3%	± 4%
3.	Deviation Straightness of sides	ISO 10545-2	± 0.5%	± 0.1%	± 0.1%	± 0.1%
4.	Deviation Rectangularity	ISO 10545-2	± 0.5%	± 0.1%	± 0.1%	± 0.1%
5.	Deviation Surface Flatness	ISO 10545-2	± 0.5%	± 0.2%	± 0.1%	± 0.15%
6.	Surface Quality	ISO 10545-2	95% of the tiles shall be free from visible defects	Min 95% free from visible defects	No visible defects	Min 98% free from visible defects
7.	Modulus of Rupture	ISO 10545-4	≥ 35 N/mm ²	Avg. 47 individual min.44	≥ 45 N/mm ²	Avg. 47 individual min.44
8.	Breaking Strength	ISO 10545-4	≥ 1300N	1500 N, Min.	≥ 2200 N	≥ 2200 N
9.	Water Absorption	ISO 10545-3	≤ 0.5% ind. max. 0.6%	≤ 0.08% ind. max. 1%	≤ 0.05%	≤ 0.05% ind. max. 0.08%
10.	Density	ISI 3630-2	2.2gm/cc, min	2.2gm/cc, min	> 2.4 gm/cc	> 2.25 gm/cc
11.	Abrasion Resistance	ISO 10545-6	max.175mm ³	100, max	< 144mm ³	< 144mm ³
12.	Stain Resistance	ISO 10545-14	Test method available	Resistant	Resistant	Resistant
13.	Chemical Resistance	ISO 10545-13	Manufactured to state classification	Required	No damage	No damage
14.	Thermal Expansion	ISO 10545-8	9×10 ⁻⁴ K ⁻¹ max	6×10 ⁻⁴ K ⁻¹ max	6×10 ⁻⁴ K ⁻¹ max	6×10 ⁻⁴ K ⁻¹ max
15.	Moisture Expansion	ISO 10545-10	Test method available	NM	Null	Null
16.	Thermal Shock Resistance	ISO 10545-9	Test method available	10 cycles, min.	10 cycles, min.	10 cycles, min.
17.	Frost Resistance	ISO 10545-12	Required	Required	Frost Proof	Frost Proof
18.	Scratch Hardness of Surface (moh's scale)	ISI 3630-13	≥ 6	6, min.	≥ 7	≥ 6

* Vitrified tiles have resistance to most of the stains / chemicals but it is recommended to take due care while laying and for day to day maintenance.

PACKING DETAILS

Size (mm)	No. of tiles per box	Coverage area per box
600x600 mm	4 Pcs.	1.44 Sq. Mtr.
800x800 mm	3 Pcs.	1.92 Sq. Mtr.
800x1200 mm	2 Pcs.	1.92 Sq. Mtr.

The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not relative sizes. Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles. Please inspect all tiles prior to installation; company will not entertain complaints, once tiles are laid / fixed. Price category & PEI grade may change without any notice. Customers are advised to confirm it before placing order.



Kajaria
TRANSFORM YOUR WORLD

Kajaria Ceramics Limited

Corporate Office: J1/B1(Extn.), Mohan Co-op Industrial Estate, Mathura Road, New Delhi-110044, Ph.:+91-11-26946409, Fax: +91-11-26946407

Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.: +91-0124-4081281

CIN No.: L26924HR1985PLC056150, E-mail: info@kajariaceramics.com, Web.: www.kajariaceramics.com

[facebook.com/KajariaCeramicsLimited](https://www.facebook.com/KajariaCeramicsLimited) twitter.com/KajariaCeramic, Tollfree : 1800-11-2992

Download Kajaria App  